

DALI One Relay

product ref: 208A1-B

The **dali one relay** provides addressable control of non-Dali lamps and other devices such as fan-coils, blinds, water valves etc within a Dali environment.


The unit is typically used in applications where the majority of controlled lights are Dali and yet certain luminaires are not available with Dali ballasts but need to be switched, or where other devices such as water valves, VAV units or window blinds require to be controlled.

The **dali one relay** connects to the Dali buswire which links Dali luminaires, sensors and other devices to the Dali control module: the mechanically-latched relay operates in response to commands transmitted along the Dali bus.



The unit derives its power from the Dali Bus.

features

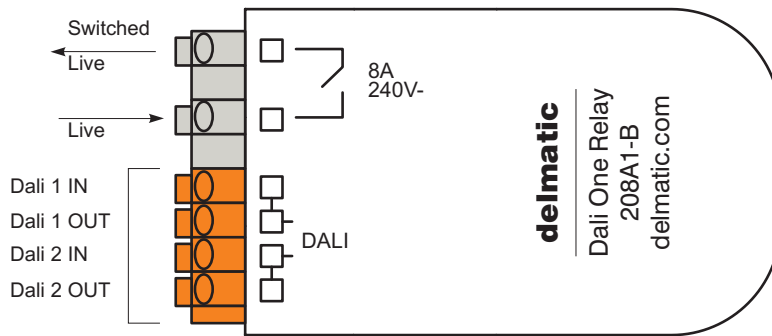

connection

The **dali one relay** is compatible with the complete range of Delmatic Dali control modules. The unit may connect to:

- the Dali bus from the **Dali Buswire module** which connects to Dali luminaires and Dali devices,
- the Dali bus on any of the twelve channels from the **DaliBroadcast module**

technical details

switched output

1 x 8A switched output (max 1.5 sq.mm cable)

Dali bus inputs

2 ports (two-pin) for bus connection (max 1.5 sq.mm cable)

construction / ambient temp / protection class

plastic enclosure / 0 to +45°C

dimensions

