

Smart IP Router

product 106S9

delmatic.com

sheet 1/2

Delmatic's Smart IP Router forms part of a site-wide lighting management and integrated building system, and optimises data transmission across the network.

The Smart IP Router is a versatile device that connects Lon devices to IP-based applications, and incorporates built-in drivers for LonWorks and LNS Remote Network Interface as well as Modbus TCP, BACnet/IP, MQTT and REST protocols.


The Router is easy to configure and manage using Delmatic Lightscape software as well as on-board web pages. The router accepts volt free inputs and provides volt free output points.

Passcode-protected controls provide access to master on and off functions and emergency test routines. The unit accepts the connection of a laptop or handheld device for local configuration and monitoring and includes integral network termination resistors.

The Smart IP Router is supplied with BACnet features as standard, making it a powerful LON BACnet device.



smart IP router features

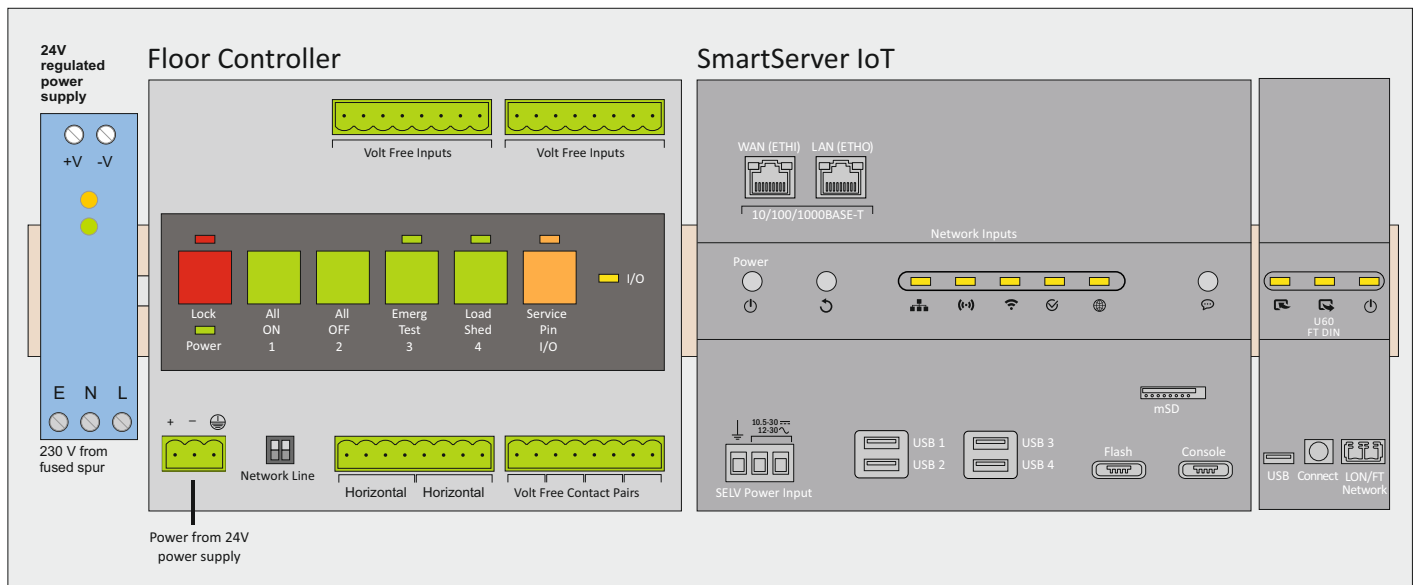

controls:

- Service button,
- Reset button,
- Master on/off control
- Emergency test start/stop
- Loadshed start/stop
- Network line resistance selector

indicators:

- Power On,
- Ethernet link, Ethernet activity
- LonWorks Transmit and Receive activity
- Remote Network Interface connection status
- Emergency test active
- Service LED (floor controller)
- Service LED (router)

delmatic

London, UK
+44 (0) 20 3184 2000
delmatic@delmatic.com

Abu Dhabi, UAE
+971 (0) 2 555 6590
sales@delmaticarabia.ae

Dubai, UAE
+971 (0) 4 256 6722
sales@delmaticarabia.ae

Doha, Qatar
+974 4452 8226
sales@delmaticqatar.com

Riyadh, Saudi Arabia
+966 (0)11 211 8170
sales@delmaticsaudi.com


mounting and dimensions

The Smart IP Router should be installed in an accessible location, ideally at a height of 1.5 m from floor level.

The box is mounted using four M5 screw fixings. The top two holes use keyhole fixings for ease installation.

All dimensions in millimetres.

Top and bottom sides contain three 20 mm knockouts for conduit entry.

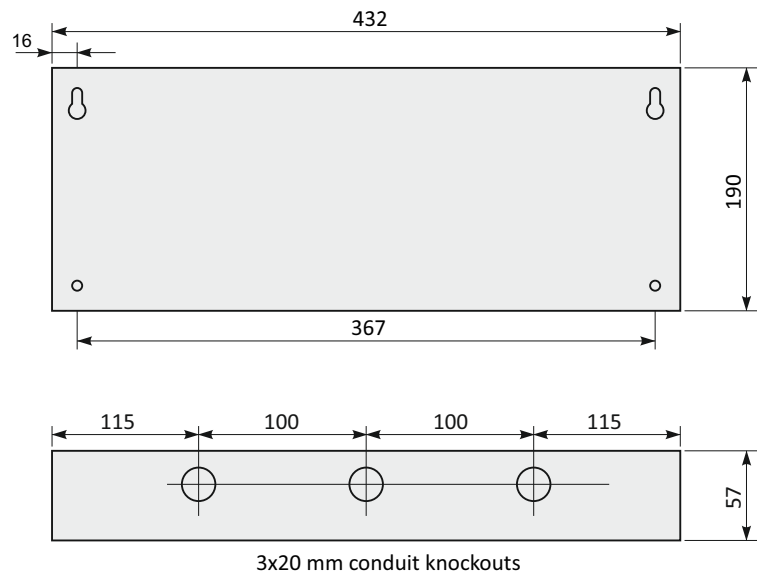

technical details

operating input voltage	100 - 240VAC (-6%/+10%), 50/60Hz
power consumption	<15 watts
operating temperature	0 to +50°C
operating humidity	10 to 90% RH @ 50°C (non-condensing)
dimensions (mm)	432 (w) x 190 (h) x 57 (d)
housing/enclosure	painted galvanised steel enclosure
ethernet port	10/100/1000BaseT, auto-selecting, auto polarity
digital inputs	4 volt free inputs
relay outputs	4 SPST relays rated max. 50VDC@10mA - 1A
network capacity	supports up to 60 lighting control modules
connectivity	Connects to building IT network linking routers Connects to horizontal bus linking up to 60 lighting control modules via twisted pair cable.
buswire spec	refer to Buswire Specification data sheet
network cable length	500m (maximum free topology without repeater)

network and device interfaces

- IP via built-in 10/100/1000BaseT Ethernet interface
- TP/FT-10 free topology twisted pair
- ISO/IEC 14908-1 (LONWORKS) with built-in LON transceiver
- 2 RJ-45 jacks for WAN and LAN, including LON IP-70 and IP-852, BACnet/IP and Modbus TCP
- Custom drivers using built-in Ethernet,

user interfaces

The Smart IP Router can be locally or remotely configured via:

- Delmatic's Lightscape Server and GUI Client software.
- Built-in web pages for network installation, commissioning, scheduling, alarming, data logging, and network integration.

standards-based protocols

- IP local and wide area networking protocols and Internet standards include TCP, IPv4, IPv6, PPP, CHAP, PAP, DHCP, DNS, FTP, ICMP, MD5, SMTP, SNMP, SNTP, HTTP, HTTPS, and TLS.
- Additional IP application protocols: HTML, MQTT and REST.
- NAT is supported

IP-852 routing

- ISO/IEC 14908-4 (IP-852) routing of Lon over IP network
- IP-852 channel supports thousands of packets per second for high-performance monitoring and control